




KONICA MINOLTA

TECHNOLOGY

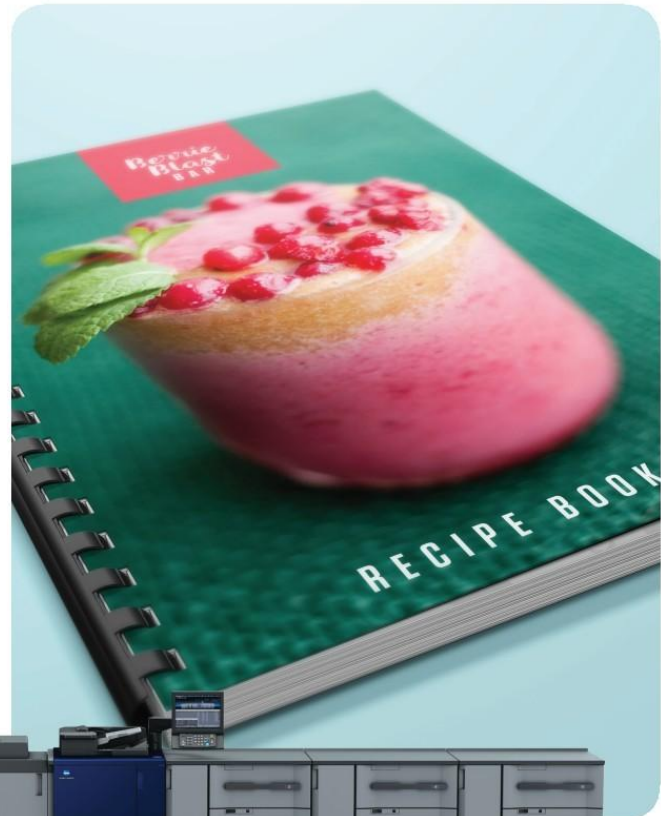

# AccurioPress C3080

COLOR DIGITAL PRODUCTION PRESS / COPIER / SCANNER

- 80 ppm output for high-volume color print production
- Inline, closed loop quality management system
- Printing on media weights up to 350 gsm
- Envelope printing
- Optimized printing on all types of stocks with hundreds of built-in media catalogs
- Single engine can print duplex banners and output finished books

- High-speed, double-sided scanning
- Duty cycle 864,000
- U.S. Energy Star compliant
- Banner printing up to 51" with optional bypass tray
- Duplex banner printing up to 30"

# AccurioPress C3080

COLOR DIGITAL PRODUCTION PRESS / COPIER / SCANNER

AccurioPress series has it all to grow your business: 80 ppm print/copy output, advanced processing for resolution equivalent to 3,600 dpi, our exclusive Simitri® HD<sup>2</sup> toner for offset-quality color at an affordable cost, superior stability over long print runs on a variety of substrates. Automated color and registration, duplex banner printing and more powerful finishing options help meet all client demands.

SYSTEM SPECIFICATIONS	ACCURIOPRESS C3080
<b>Resolution</b>	1,200 x 1,200 dpi (3,600 equivalent) 8-bit, 256 gradations
<b>Paper weight</b>	<b>Standard:</b> 62–256 gsm <b>Opt.:</b> MB-506, LU-202XL/m – 62–300 gsm PF-707m – 62–350 gsm
<b>Duplex unit</b>	62–350 gsm
<b>Paper sizes (max.)</b>	<b>Standard:</b> 330 x 487 mm (13" x 19.2") <b>Opt.:</b> MB-506 – 330 x 1200 mm LU-202XL – 330 x 750 mm
<b>Image loss (max.)</b>	4 mm or less for top edge 4.5 mm or less for bottom edge 3.0 mm or less for right/left edges
<b>Paper input capacity</b>	<b>Standard:</b> 1,500 sheets <b>Max.:</b> 15,390 sheets
<b>Paper output capacity</b>	<b>Max.:</b> LS-506 Stacker – 5,000 FS-532 Finisher – 4,500
<b>Main unit dimensions (W x D x H)</b>	31.5" x 35.6" x 42.4"
<b>Main unit weight</b>	703 lb
<b>Power requirements</b>	AC208 – 240 V, 60 Hz, 24A dedicated line

## PRODUCTIVITY

<b>8.5" x 11" (max. per minute)</b>	80 ppm
<b>Monthly duty cycle</b>	864,000 pages

## CONTROLLER

<b>IC-605A/B Internal</b>	IC-605A
<b>Konica Minolta controller</b>	
<b>IC-313 External EFI Fiery controller</b>	Available
<b>IC-417 Internal EFI controller</b>	Available
<b>IC-314 External Creo controller</b>	Available

## SCANNER SPECIFICATIONS

<b>Scan speed (dual) (8.5" x 11")</b>	120 ipm simplex / 240 duplex
<b>Scan resolution</b>	600 x 600 dpi
<b>Scan modes</b>	TWAIN scan, Scan-to-HDD, Scan-to-FTP, Scan-to-SMB, Scan-to-Email, Scan-to-USB
<b>Scan formats</b>	PDF, TIFF, JPEG (all controllers), Secured PDF, Compact PDF, XPS, PDF/A-1a, 1b (with IC-605)

## COPIER SPECIFICATIONS

<b>Gradations</b>	256 gradations
<b>First copy out</b>	6.5 sec. or less
<b>Magnification</b>	25–400%, in 0.1% steps

## KONICA MINOLTA IMAGE CONTROLLER IC-605

<b>Type</b>	Embedded
<b>CPU</b>	Intel Core i5 4570S 2.9 GHz
<b>Memory</b>	<b>Max.:</b> C3080 – 18 GB, C3080P – 16 GB Including UK-104
<b>HDD</b>	<b>Max.:</b> 3.5 TB including UK-104
<b>Page-description language</b>	PS3 (CPSI3020), PDF version 1.7, TIFF version 6 compliant, PPML version 2.2, PCL5c compatible, PCL XL (PCL6 version 3) compatible, APPE version 4.2*, PDF/VT version 2* <sup>†</sup>
<b>Printing method</b>	TCP/IP, NetBEUI, IPP, WSD, SMB, Bonjour
<b>Applicable OS</b>	Windows Server 2008*/R2, 7, 8.1 Server 2012/R2, 10, Server 2016 Mac OS X v10.8 – v10.12
<b>Interface</b>	Ethernet (10Base-T / 100Base-TX / 1000Base-T)

\*<sup>†</sup>UK-104 + UK-218 required, not compatible with C3070L.

## FIERY IMAGE CONTROLLER IC-313 VERSION 2.0

<b>Type</b>	Server
<b>CPU</b>	Intel® Core™ i5-4570S Processor (up to 3.6 GHz, quad core)
<b>Memory</b>	4 GB
<b>HDD</b>	2 TB
<b>Page-description language</b>	Adobe PostScript 3 (3020), PDF 1.7, PPML v3.0GA, APPE 3.0, PCL 5/6 emulation
<b>Printing method</b>	TCP/IP, SNMP, SMB, FTP, LPR, IPP, Bonjour
<b>Applicable OS</b>	Windows 7 / 8.1 / 10, Windows Server 2012 / 2016* <sup>†</sup> Mac OS X v10.8 – v10.12
<b>Interface</b>	10Base-T / 100Base-TX / 1000Base-T

\*<sup>†</sup>Including 64-bit versions.

## FIERY IMAGE CONTROLLER IC-417

<b>Type</b>	Embedded
<b>CPU</b>	Intel® Celeron® Processor G1820 (2M Cache, 2.70 GHz)
<b>Memory</b>	2 GB
<b>HDD</b>	500 GB SATA
<b>Page-description language</b>	Adobe PostScript3 (3020), PDF 1.7, PCL 5/6 emulation
<b>Printing method</b>	TCP/IP, SNMP, SMB, FTP, LPR, IPP, Bonjour
<b>Applicable OS</b>	Windows 7 / 8.1 / 10* <sup>†</sup> Windows Server 2008 / 2012* <sup>†</sup> Mac OS X v10.8 / v10.9 / v10.10

\*<sup>†</sup>Including 64-bit versions.

## CREO IMAGE CONTROLLER IC-314 VERSION 2.0

<b>Type</b>	Server
<b>CPU</b>	Intel Core i7-4790S 3.2 GHz
<b>Memory</b>	12 GB (7 GB: system memory, 5 GB: image memory)
<b>HDD</b>	3 x 1 TB (1 TB system disk, 2 x 1 TB image disks)
<b>Page-description language</b>	Adobe PostScript CPSI 3020, APPE 3.4
<b>Printing method</b>	TCP/IP, SMB, LPR, Bonjour
<b>Applicable OS</b>	Windows 7 / 8.1 / 10, Windows Server 2012 / 2016* <sup>†</sup> Mac OS X v10.8 – v10.12
<b>Interface</b>	1 Gbit Ethernet LAN port x 2

\*<sup>†</sup>Including 64-bit versions.

## OPTIONS

<b>CR-101</b>	Creaser unit	<b>MK-746</b>	Envelope print guide for LU-202m and LU-202XL
<b>DF-706</b>	Automatic document feeder	<b>OC-511</b>	Original cover
<b>EF-103</b>	Envelope fusing	<b>OT-510</b>	Open stacker (3,000-sheet stacking)
<b>FA-502</b>	Feed adjuster	<b>RU-511</b>	Output tray
<b>FD-503</b>	Multi-folding unit	<b>PB-503</b>	Perfect binder
<b>FD-504</b>	Square-folding unit	<b>PF-602</b>	Paper feed unit
<b>FS-531</b>	50-sheet staple finisher	<b>PF-707m</b>	Paper feed unit
<b>FS-532</b>	100-sheet staple finisher	<b>PI-502</b>	Multi-post inserter
<b>FS-532</b>	100-sheet staple finisher with PK and SD-510	<b>PK-512</b>	2/3-hole punch kit for FS-612/FS-531
<b>PK/SD</b>		<b>PK-522</b>	Punch kit
<b>FS-612</b>	Booklet finisher	<b>RU-510</b>	Relay unit
<b>GBC Punch</b>	GBC punch unit	<b>RU-518</b>	Relay unit
<b>G2</b>	(punch dies sold separately)	<b>SD-506</b>	Saddle stitch unit
<b>GP-501</b>	GBC punch unit (punch dies sold separately)	<b>SD-510</b>	Saddle stitch kit
<b>GP-502</b>	Ring binder	<b>SD-513</b>	Saddle stitcher
<b>HM-103</b>	Humidification unit	<b>SD-513/F</b>	Saddle stitcher front
<b>IQ-501</b>	Intelligent Quality Optimizer	<b>TU-503</b>	Trimmer unit
<b>LS-506</b>	Large stacker unit	<b>UK-104</b>	Upgrade kit (additional 500 GB memory)
<b>LU-202m</b>	Paper feed tray	<b>WT-511</b>	Working table
<b>LU-202XL</b>	Extra long paper feed unit (29.5" max.)	<b>Plockmatic</b>	Plockmatic SD-350/500 booklet maker
<b>LU-202XLm</b>	Extra long paper feed unit (29.5" max.)		
<b>MB-506</b>	Multi-bypass tray		
<b>MB-508</b>	Multi-bypass tray		
<b>MK-732</b>	Mount kit for PI-502		
<b>MK-737</b>	Mount kit for 3rd party options		
<b>MK-740</b>	Media feeding kit for banner printing (300 sheets)		
<b>MK-740m</b>	Media feeding kit for banner printing (1,000 sheets)		

See brochure for full product options available.



KONICA MINOLTA

KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC.  
100 Williams Drive, Ramsey, New Jersey 07446

CountOnKonicaMinolta.com



Item #: APC3080SS  
3/2018-C

© 2018 KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA and the KONICA MINOLTA logo are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design & specifications are subject to change without notice.