



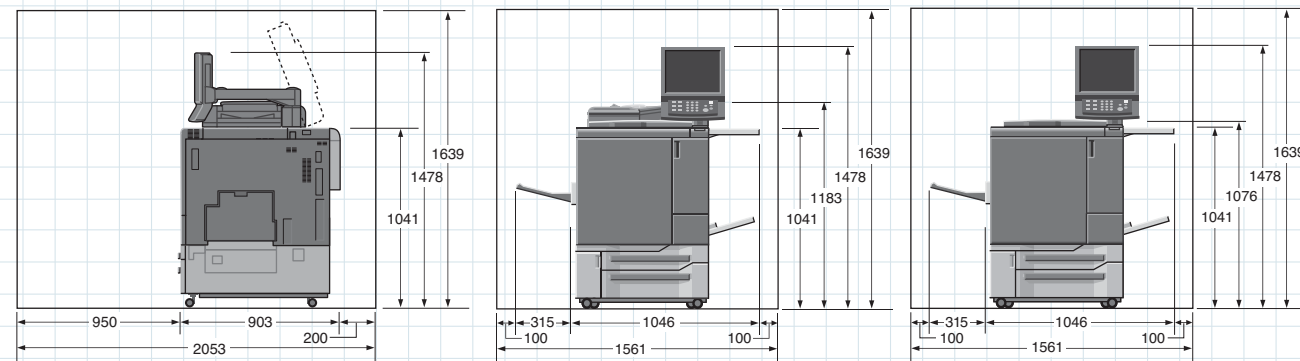


Side View
bizhub PRO C1060L+
OT-502+DF-626+MB-506

Front View
bizhub PRO C1060L+
OT-502+DF-626+MB-506

Front View
bizhub PRO C1060L+
OT-502+OC-509+MB-506

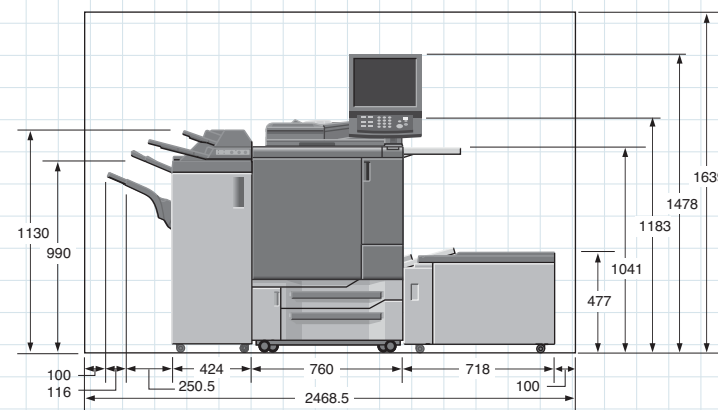

Front View
bizhub PRO C1060L+FS-626+LU-202+MB-506

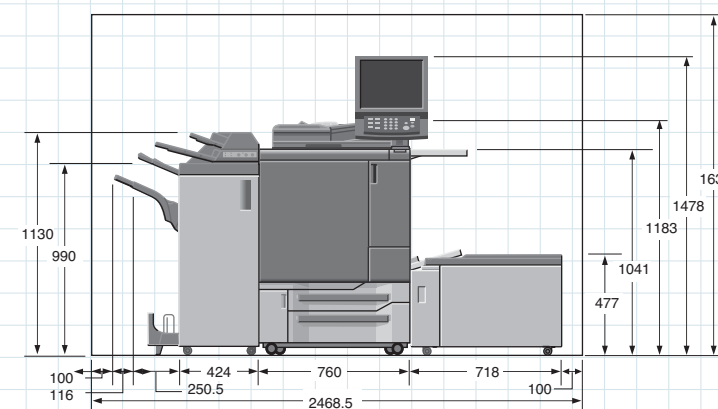

Front View
bizhub PRO C1060L+FS-612+DF-626+LU-202+MB-506




KONICA MINOLTA

bizhub PRO C1060L

Spec Sheet

System

*1 Select one of OC-509 or DF-626. However, it is not for C1070P since it does not have a scanner and the DF function.

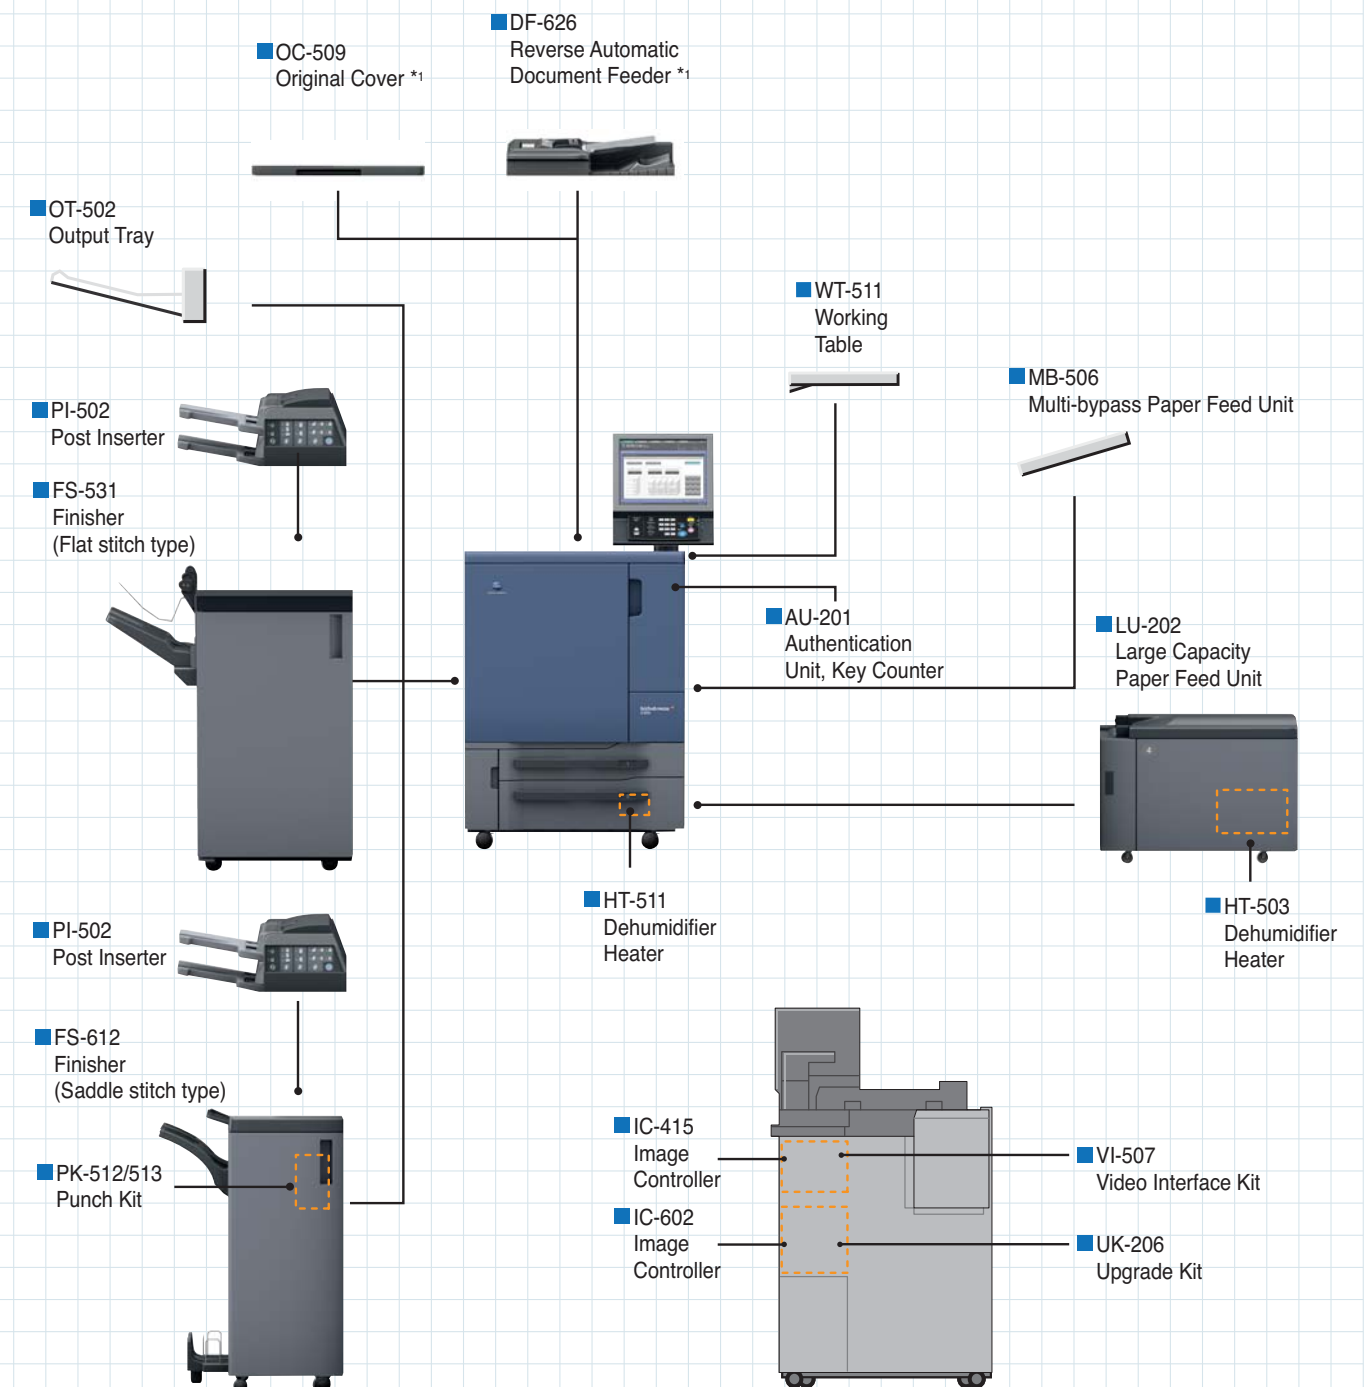

This product is not available for some countries or regions.

Specifications

bizhub PRO C1060L General Specifications

Type	Console type	
Copy Method	4-coupled drum tandem laser electrostatic method	
Resolution	Scan	600 dpi x 600 dpi
	Print	1,200 dpi (Equivalent to 3,600 dpi) x 1200 dpi
Gradation	8-bit / 256 Gradation	
CPU	Pentium G850 2.9 GHz	
System memory capacity	6 GB	
HDD	1.5 TB	
Original Type	Sheet, Book, Solid object	
Max. Original Size	A3 or 11x17	
Max. Print Area	323 mm x 480 mm	
Output Size	Standard: SRA3, A3, B4, A4, B5, 13x19, 11x17, 8 1/2x14, 8 1/2x11, 5 1/2X8 1/2S	
(S: Short Edge Feed 	Tab paper (A4, 8 1/2x11)	
	Max. 330 mm x 487 mm, Min. 140 mm x 182 mm	
	Multi-bypass(Optional): SRA3, A3, B4, A4, B5, 13x19, 11x17, 8 1/2x14, 8 1/2x11, 5 1/2X8 1/2S	
	Tab paper (A4, 8 1/2x11)	
	Max. 330 mm x 487 mm, Min. 100 mm x 148 mm	
Image Loss	Max. 4 mm or less for top edge, Max. 4.5 mm or less for bottom edge, Max. 3.0 mm or less for right/left edges	
Warm-Up Time	390 seconds or less	
First Copy Out Time	Colour	7.6 seconds or less (A4, 8 1/2x11)
	Black and White	6.3 seconds or less (A4, 8 1/2x11)
Continuous Copy Speed	Colour	61 sheets/min. (A4) , 33 sheets/min. (A3)
	Black and White	61 sheets/min. (A4)
Copy Magnification	Fixed Magnification	Inch: x 1.000, x 2.000, x 1.545, x 1.294, x 1.214, x 0.785, x 0.772, x 0.647, x 0.500 Metric: x 1.000, x 2.000, x 1.414, x 1.189, x 0.840, x 0.707, x 0.500 x 0.250 to x 4.000 (Each 0.001 step)
	Zoom Magnification	
Tray Capacity	Standard	Tray 1 (500 sheets, 80 g/m ²) Tray 2 (1,000 sheets, 80 g/m ²)
	Option	MB-506 (Multi-bypass, 250 sheets, 80 g/m ²)* ¹ * ² LU-202 (2,500 sheets x 80 g/m ²)* ¹
Paper Type	Plain, Fine, Recycled paper, Color, Coated-GL, Coated-ML, Coated-GO, Tab paper	
Paper Weight	Standard	62 g/m ² to 256 g/m ² * ³ (Plain, Fine, Colour Specific) 81 g/m ² to 256 g/m ² * ³ (Coated)
	Option(MB-506)	62 g/m ² to 300 g/m ²
Continuous Copy Count	Up to 9,999 sheets	
Paper Capacity	150 sheets (80 g/m ²) * ⁴	
Power Source	Inch: AC208 to 240V 21A 60 Hz Metric: AC220 to 240V 20A, 50 Hz / 60 Hz	
Power Consumption	Inch: 4,900W or less (Main body only)	
	Metric: 4,700W or less (Main body only)	
Dimensions [W] x [D] x [H]	760 mm* ⁵ x 903 mm* ⁶ x 1073 mm* ⁷ / 29.92* ⁵ x 35.55* ⁶ x 42.24* ⁷	
Main body + OC-506	(Main body + Original Cover)	
Weight	Approximately 291kg / 641 lb (Main body only)	

*1 MB-506, PF-602m, PF-707 and LU-202 are the options.

*2 PF-602m and PF-707 are not available when MB-506 is installed.

*3 For paper size A4 or smaller than 8 1/2 x 11, it is up to 216 g/m²

*4 The OT-502 is attached as an option.

*5 Excluding the control panel, output tray, work table.

*6 Including the rear duct.

*7 Height to the top of the original cover excluding the control panel.

bizhub PRO C1060L Printer Controller

Image Controller IC-602

Type	AIO to the engine (Option)	
CPU	Conforms with main unit specification	
Memory	Max. 10 GB Details: 2 GB + 4 GB (Standard of the main body) + 4 GB (IC-602)	
HDD	Max. 1.5 TB Details: 500 GB x 3 (Standard of the main body)	
Page-description Language	Adobe PostScript3 (PS3019), PDF direct print (PDF version 1.7), TIFF direct print (TIFF version 6 compliance), PPML (version 2.2), PCL-5c compatible, PCL XL (PCL6 version 3) compatible	
Printing Method	Pserver (IPX/SPX), LPD/LPR (TCP/IP), IPP (TCP/IP), AppleTalk (EtherTalk), Bonjour (TCP/IP), Web service printing (TCP/IP), NPrinter / RPrinter (IPX/SPX), Raw Port (TCP/IP), SMB	
Applicable OS	PS Plug-in Windows XP / Server 2003 / Vista / Server 2008 / 7 / 8 / Server 2012* ¹ MacOSX 10.5 / 10.6 / 10.7 / 10.8 (PPC/Intel) PS PPD* ² Windows XP / Server 2003 / Vista / Server 2008 / 7 / 8 / Server 2012* ¹ Linux CUPS	
Interface	Ethernet (1000BASE-T / 100Base-TX / 10Base-T) with IPv6, USB	
Scanner Resolution	200 / 300 / 400 / 600 dpi	
Data Format	PDF, TIFF, JPEG, XPS	
Driver	HDD Twain Driver, Real Time Mode Twain Driver	

*1 Includes 64-bit.

*2 WHQL is not obtained for the PS PPD driver

Image Controller IC-415

Type	Embedded	
CPU	Conforms with main unit specification	
Memory	2 GB	
HDD	500GB SATA	
Page-description Language	Adobe PostScript3 (PS3019), (PDF 1.7), PCL 5/6 emulation	
Printing Method	TCP/IP, SNMP, SMB, FTP, LPR, IPP, Bonjour	
Applicable OS	Windows XP / Vista / 7 / 8 / Server 2003 / Server 2008* ¹ MacOSX 10.5 / 10.6 / 10.7 / 10.8	
Scanner Resolution	200 / 300 / 400 / 600 dpi	
Data Format	PDF, TIFF, JPEG	
Driver	Twain Plug-in	

* Includes 64-bit.

Options

■ Reverse Automatic Document Feeder DF-626

Paper Type	1-sided	Simplex original mode: 35 g/m ² to 210 g/m ² Duplex original mode: 50 g/m ² to 128 g/m ²
	2-sided	Simplex original mode, Duplex original mode: 50 g/m ² to 128 g/m ²
Paper Size	A3, B4, A4, B5, A5, B6S, 11x17, 8 1/2x11	
Capacity	100 sheets (80 g/m ²)	
Scan Speed (A4)	Scan Resolution: 600 dpi 42 sheets/min. Scan Resolution: 300 dpi 70 sheets/min.	
Power Source	Supplied from the machine	
Dimensions [W] x [D] x [H]	600 mm x 575 mm x 130 mm / 23.62" x 22.64" x 5.12"	
Weight	Approximately 16.7 kg / 36.82 lb	

■ Multi bypass paper feed unit MB-506

Paper Weight	62 g/m ² to 300 g/m ²
Paper Size	Max. 330 mm x 487 mm, Min. 100 mm x 148 mm
Tray Capacity	250 sheets (80 g/m ²)
Power Source	Supplied from the main body
Power Consumption	Max. 28W or less
Dimensions [W] x [D] x [H]	485 mm x 503 mm x 327 mm 19.09" x 19.8" x 12.87" (Max. dimensions of the whole unit)
Weight	Approximately 4.2 kg / 9.26 lb

■ Dehumidifier heater HT-511

Power Source	Supplied from the main body
Max. Power Consumption	40W or less
Dimensions [W] x [D] x [H]	240.6 mm x 124.1 mm x 7.8 mm / 9.47" x 4.89" x 0.31"
Weight	232.4 g / 0.51 lb

■ Large Capacity Unit LU-202

Paper Size	SRA3, A3, B4, A4, B5, 13x19, 12x18, 11x17, 9x11, 8 1/2x14, 8 1/2x11
(S: Short Edge Feed 	Tab paper (A4, 8 1/2x11) Max. 330 mm x 487 mm, Min. 210 mm x 182 mm* ¹
Applicable Paper	Plain paper, High quality paper, Coated paper: 62 g/m ² to 300 g/m ² * ¹
Paper Capacity	2,500 sheets (80 g/m ²)* ²
Power Source	Supplied both from the main body.
Max. Power Consumption	DC: 70W or less, AC: 50W or less (Not including HT-503)
Dimensions [W] x [D] x [H]	710 mm x 639 mm x 477 mm / 27.95" x 25.16" x 18.78"
Weight	Approximately 42 kg / 92.59 lb

*1 Available types of paper weighing 300 g/m² are limited to specific types.

*2 Stacked height 275 mm

■ Dehumidifier heater HT-503

Power Source	Supplied from the main body
Max. Power Consumption	DC: 4W or less, AC: 290W or less
Dimensions [W] x [D] x [H]	Dehumidifier Fan Heater Unit: 293 mm x 82 mm x 197 mm / 7.76" x 11.54" x 3.22" Power Source Unit: 121 mm x 80 mm x 160 mm// 4.76" x 6.3" x 3.15"
Weight	Dehumidifier Fan Heater Unit : 1.5 kg / 3.31 lb Power Supply Unit: 0.9 kg / 1.98 lb

■ Finisher FS-531

Paper Weight (Staple mode)		60 g/m ² to 209 g/m ²
Paper Size (Staple mode)		Max. 314 mm x 458 mm, Min. 182 mm x 148 mm
Paper Capacity (80 g/m ²)	Non-sort mode, Sort/group mode	Max. 3,000 sheets (A4, B5, 8 1/2x11)
	Staple mode	*2 to 9: 100 sets (Direction: 150 mm to 417 mm) / 50 sets (Other) *10 to 20: 50 sets *21 to 30: 30 sets *31 to 40: 25 sets *41 to 50: 20 sets
Stapling mode Types (Staple Position)	Corner Stapling 2 staplings	Parallel or diagonal depending on paper size Center spreading 162 mm pitch
Power Source		Supplied from the main body.
Max. Power Consumption		80W or less
Dimensions [W] x [D] x [H]		424 mm* x 656 mm x 990 mm / 16.69" x 25.82" x 39" Width including the primary (main) tray (with the edge closed): 674.5 mm / 26.56" Width including the primary (main) tray (with the edge pulled out): 790.5 mm / 31.12"
Weight		Approximately 60 kg / 132.28 lb

* Excluding the primary (main) tray

Specifications

■ Finisher FS-612

Paper Weight	Staple / Saddle Stitching / Half-Fold mode	60 g/m ² to 105 g/m ²
Paper Size	Staple mode	A3, B4, A4, B5, A5, 12x18, 11x17, 8 1/2x14, 8 1/2x11, 9 x 11 Tab paper* ¹ (A4, 8 1/2x11) Max. 314 mm x 458 mm, Min. 182 mm x 140 mm, 182 mm x 148 mm* ²
	Saddle stitching mode	A3, B4, A4, 12x18, 11x17, 8 1/2x14, 8 1/2x11 Max. 314 mm x 458 mm Min. 210 mm x 279mm
	Half-Fold mode	A3, B4, A4, 12x18, 11x17, 8 1/2x14, 8 1/2x11 Max. 314 mm x 458mm, Min. 210 mm x 279 mm
	Tri-Folding mode	A4S, 8 1/2x11S
	Non-sort mode, Sort/group mode	Max. 2,500 sheets A4, A4S, B5, 8 1/2x11 1500 sheets
Paper Capacity (Main Tray)	Saddle Stitching mode	SRA3 *1, A3, B4, 12x18, 11x17, 8 1/2x14
Paper Weight 62 g/m ² to 300 g/m ²		Length in the sub scan direction: 299 mm or less: 15 sets with 5 sheets Other than the above: 20 sets with 5 sheets
Paper Capacity (Booklet Tray)	Folding mode	Length in the sub scan direction: 299 mm or less: 25 sets with 3 sheets folding Other than the above: 33 sets with 3 sheets folding
Paper Weight 62 g/m ² to 105 g/m ²		50 sets with 1 sheet folding
Paper Capacity (Sub Tray)	Tri-folding mode	50 sets with 1 sheet folding
Paper Weight 62 g/m ² to 300 g/m ²		Max. 100 sheets SRA3, A3, B4, A4, 13x19, 12x18, 11x17, 9x11, 8 1/2x14
Power Source	Supplied from the main body.	
Max. Power Consumption	80W or less	
Dimensions [W] x [D] x [H]	424 mm* ² x 656 mm x 990 mm / 16.69"* ² x 25.83" x 39" Width including the primary (main) tray (with the edge closed): 674.5 mm / 26.56" Width including the primary (main) tray (with the edge pulled out): 790.5 mm / 31.12"	
Weight	65kg / 143.3 lb	

*1 Non-sort mode only

*2 Excluding the primary (main) tray

■ Punch Kit PK-512/513

Type	FS-integrated type punching operation device for Finisher FS-531/FS-612	
Hole Pitch	PK-512: 80 mm (2 holes / 4 holes), 108 mm (3 holes) PK-513: 21 mm, 70 mm, 21 mm (Swedish 4 holes)	
Paper Weight	60 g/m ² to 128g/m ²	
Paper Size (S: Short Edge Feed 	PK-512	2 holes: A3, B4, A4, B5, 11x17, 8 1/2x14, 8 1/2x11 3/4 holes: A3, B4, A4, B5, 11x17, 8 1/2x11
	PK-513	A3, B4, A4, B5
Applicable Paper	Plain paper, High quality paper, Colour paper, Coated paper (Same as the main body)	
Power Source	Supplied from the main body.	
Max. Power Consumption	40W or less	
Dimensions [W] x [D] x [H]	130 mm x 470 mm x 115 mm / 5.12" x 18.5" x 4.53"	
Weight	Approximately 3 kg / 6.61 lb	

■ Post Inserter PI-502

Paper Type	Plain, Color, Special, Coated (50 g/m ² to 300 g/m ²)	
Paper Size	Upper Tray	A4, B5, A5, 9x11, 8 1/2x11, 8 1/2x11S
	Lower Tray	SRA3, A3, B4, A4, B5, A5, 12x18, 11x17, 8 1/2x14, 8 1/2x11, 8 1/2x11S
Paper Capacity (80 g/m ²)	Max. 200 sheets	
Power Source	Supplied from Finisher FS-532	
Dimensions [W] x [D] x [H]	511(W) x 620 (D) x 220(H) mm (20-1/4" x 24-1/2" x 8-3/4")	
Weight	Approx. 10.5 kg / 23-1/2 lb	

